

Quick Installation Guide


Wireless N Range Extender

Model No.: EX302


V1.1501

Copyrights © 2015 by TOTOLINK All rights reserved. Website: <http://www.totolink.net>
Information in this document is subject to change without prior notice.


Product Introduction

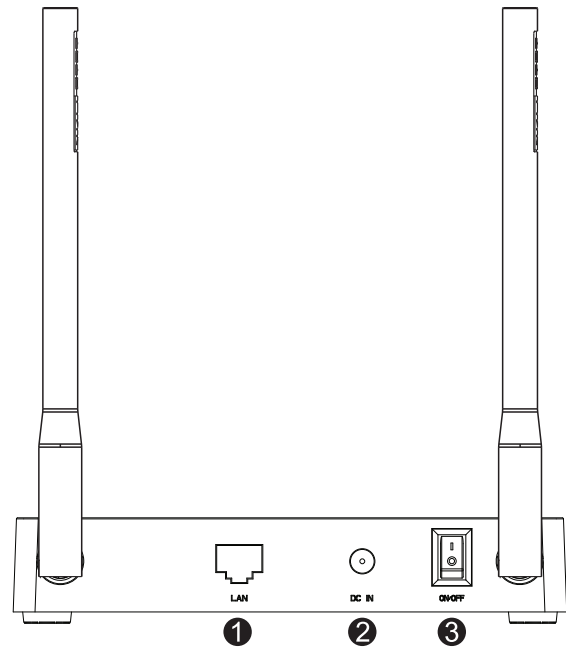

- ① LAN port: This port is used to connect to PC.
- ② DC IN: Plug power adapter to this port.
- ③ ON/OFF button: Press this button to power on the device.

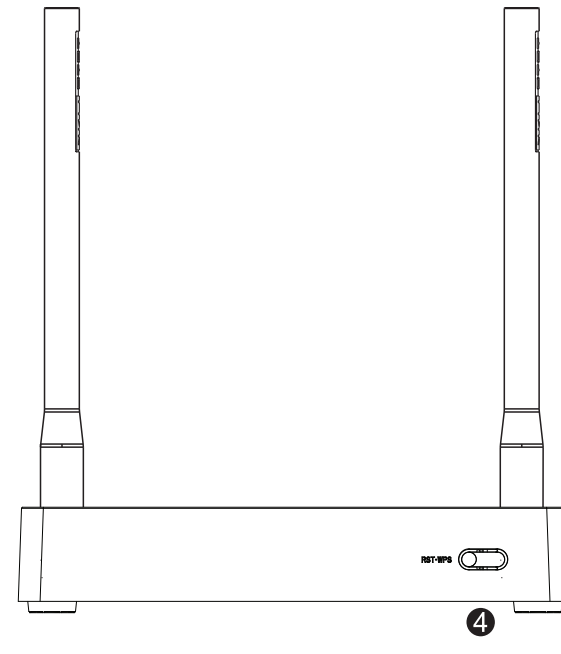

- ④ RST/WPS: Press the button for 2 seconds, WPS function enabled, for more than 5 seconds, the device will restore to factory default settings.

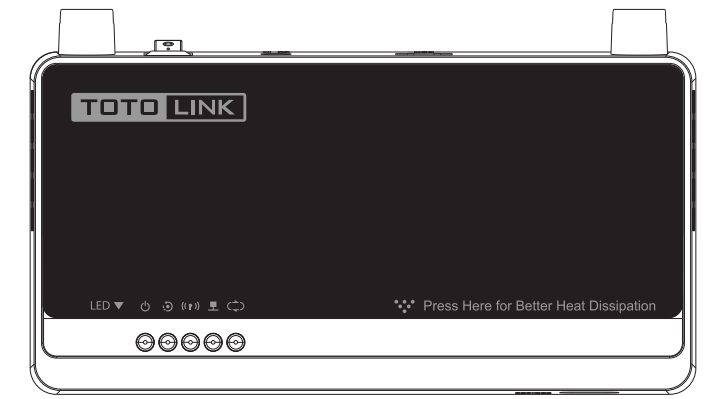


LED Indicator	Description
Power	The indicator will keep lighting when power on
CPU	The indicator blinking when power on
WiFi	When there is WiFi connection, the indicator keeps blinking
LAN	The indicator will keep lighting when connected
Extending	The indicator keeps lighting when connected to upper router

Method One: Easy Setup by WPS Button

One-click WPS connection makes it easy to extend the coverage of your existing wireless network.

- ① Press the WPS button on the router.

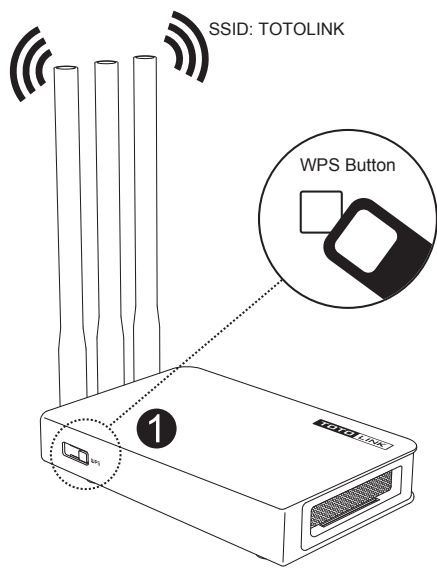


- ② Press the RST/WPS button on EX302 for 2s-3s. (Note: For more than 3s, the EX302 will reset to factory default settings)



The "extending" LED will flash when connecting and become solid light when connected.

- ③ WiFi network extending successfully, EX302's SSID has changed to upper router's SSID.

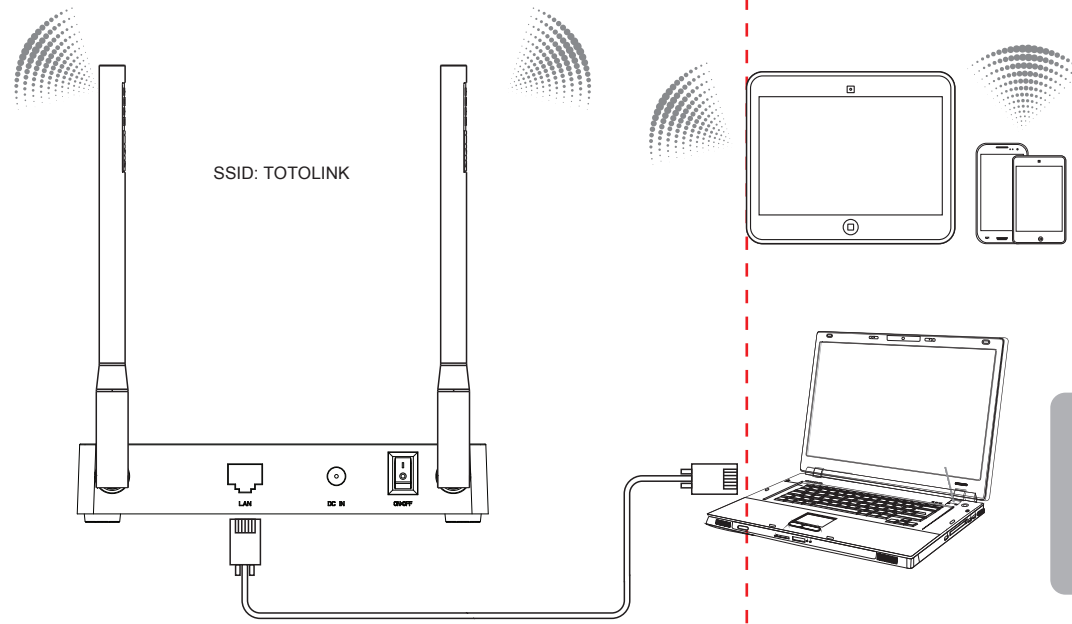


TIPS:
You can put EX302 close to the router to setup WPS connection, then place it anywhere within the WiFi coverage. EX302 can remember the last connected AP and connect to it automatically when powered on.


Method Two: Setup via Web Interface

1 Setup your PC (for wired connection)


- ① Right-click " Network — Properties — Local Area Connection — Properties".

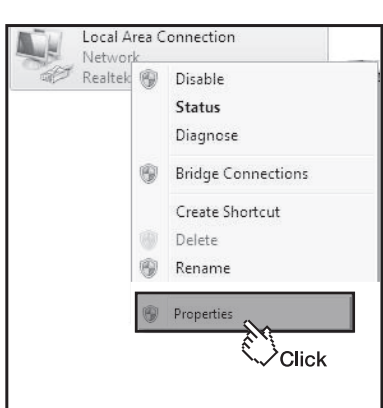

- ② Double-click "Internet Protocol Version 4 (TCP/IPv4)".

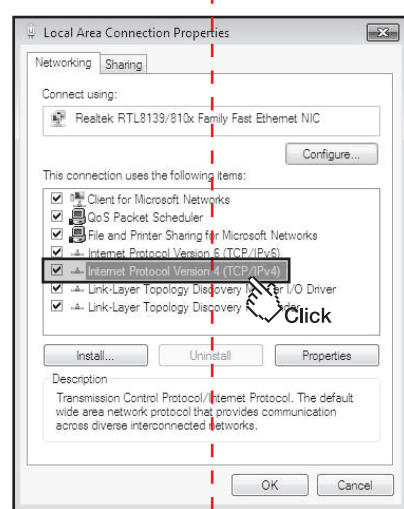


- ③ Choose "Obtain an IP address automatically", Click OK--OK.

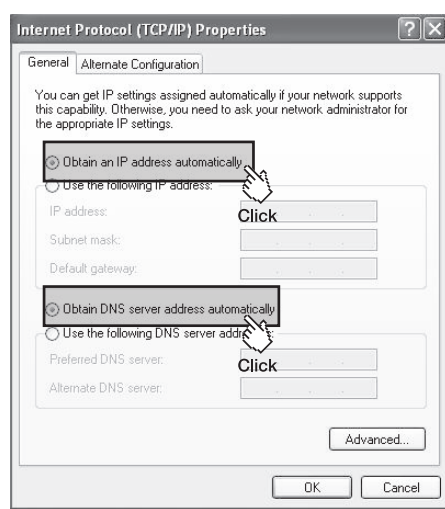


2 Setup the EX302


- ① Open Any browser, it will be redirected to EX302's Log in page automatically.

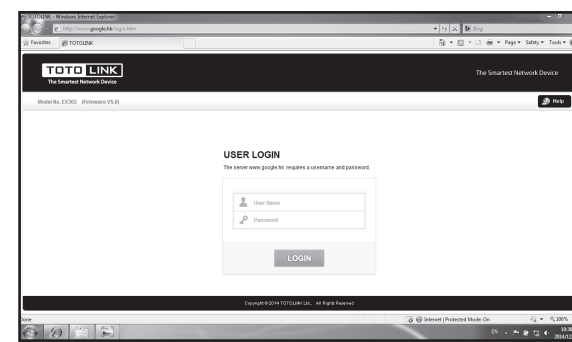


- ② Enter admin for User Name, admin for password.

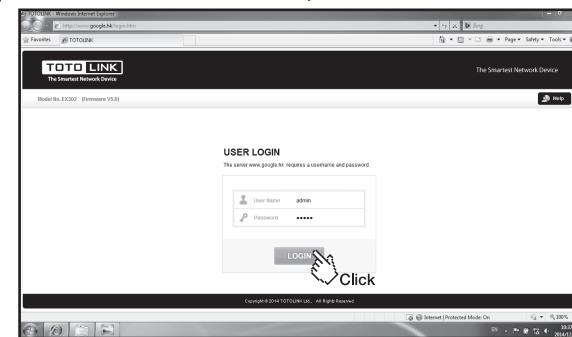


- ③ Click LOGIN, the Web settings page shows up. Choose your upper router's SSID, here we choose zion.

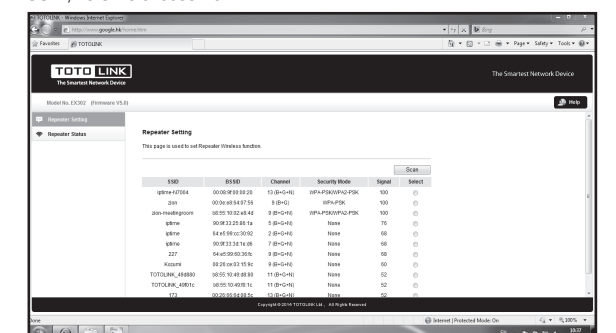


- ④ Below page will turn up requiring you to enter password of the WiFi network. Enter password, click Connect.

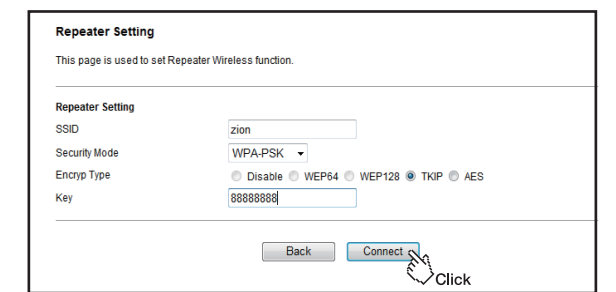


- ⑤ Please wait for a while, the EX302 is trying to connect to the router.

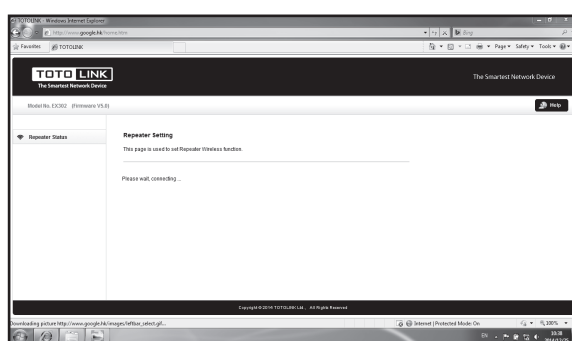

- ⑦ Try any website to test the Internet. Here we type in www.totolink.net.

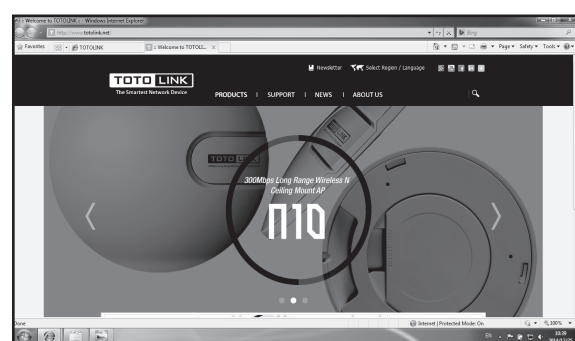

- ⑥ After connected successfully, the Web page of the router can't be entered. Because it has changed the IP address to the upper router's IP. You can check the right corner of the PC ICON, connected!

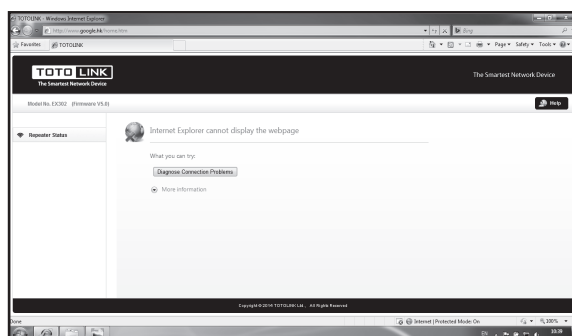

Wireless Network Connection


Search for your router's SSID to connect to the extending WiFi network.




- ① Right-click "My Network Places", click "Properties"




- ② Right-click "Wireless Network Connection", and click "View Available Wireless Networks"

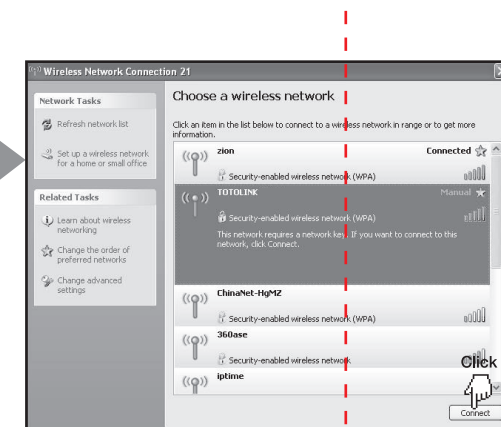

- ③ Choose the SSID of your router (e.g. TOTOLINK), then click "Connect"

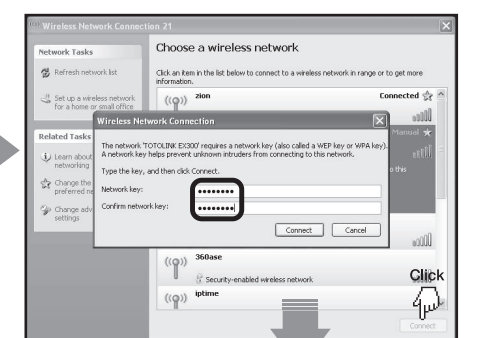

- ④ Input the encryption key and click "Connect"

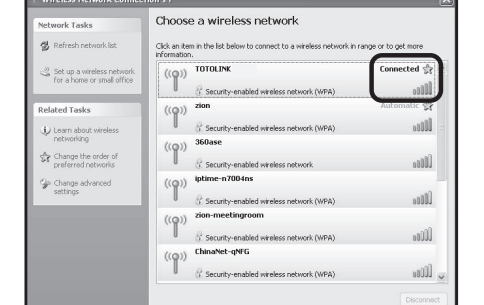

- ⑤ Wireless network has been connected.