



Glossy Thermal Receipt Printer PRP-250C




- Dimensions**



BOTTOM

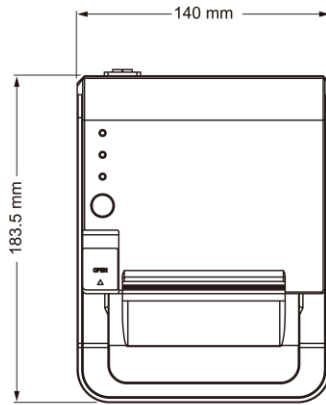

TOP

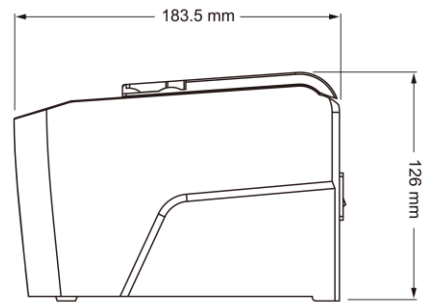

SIDE



REAR



- Specifications**

Model		PRP-250C
General		
Print Method	Thermal line printing	
Print Speed	250mm/sec	
Print Life	100 Km	
Print Font (ASCII Mode)	ANK Font. Font A: 12 x 24 dots, Font B: 9 x 17 dots	
Print Font (Graphic Font)	Chinese Character: 24 x 24 dots	
Print Resolution	576 dots/line or 512 dots/line	
Print Font Character Support *	International Font, Big 5 Chinese, GB Chinese	
Character Per Line	48 (Font A)/42 (Font B)	
Effective Print Width	72mm	
Paper Width	79.5mm± 0.5mm	
Paper Roll Diameter	≤83mm	
Paper Thickness	0.06~0.08mm	
Driver	Win 9X/Win ME/Win 2000/Win 2003/Win NT/Win XP/Win Vista/Win 7/Win 8/Win 10	
Print Command	ESC/POS print commands set compatible	
Auto Cutter	Partial	
Paper End Detection	Yes	
Over-Heat Halt-on Protection	Yes	
Buffer		
Receipt Buffer	40K bytes	
User-Defined Buffer	64K bytes (included in the RAM)	
NV Flash Buffer	20K bytes	
Interface		
Serial		
Ethernet	Multi I/O Interface: Serial +Ethernet +USB (UTP)	
USB		
Cash Drawer	+24VDC/1A, 6-Wire RJ-11 Socket	
Others		
Power Input	+24VDC/2.5A (with External Adapter 100~240VAC, 50/60Hz)	
Color	Black	
Compliance	FCC, CE, WEEE, RoHS	
Weight	1200g	
Dimension (L x W x H: mm)	183.5 x 140 x 126	
Operating Temperature	0°C ~ 45°C	
Operating Humidity	10% ~ 80% RH, non-condensing	
Storage Temperature	-10°C ~ 60°C	
Storage Humidity	10%~ 90% RH, non-condensing	

Fametech Inc.

12F.-8, NO.237, Sec.1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
Tel: +886-2-8692-2060 Fax: +886-2-8692-2061 info@fametech.com.tw
www.fametech.com.tw

