


Connectix Cabling Systems™

Easy RJ45 Connectors - Cat6 UTP

Connectix Easy RJ45 Connectors have been designed with speed and precision in mind. The UTP modular plugs are made from high quality engineering plastic with brass gold over nickel plating contacts. The crimp tool allows you to cut, strip, crimp and terminate a plug all in one with zero wastage or mess.

Features & Benefits

- Easy to verify RJ45 568A or 568B colour code
- Gold Plated Contacts
- Three prong terminal for both solid wire and stranded wire termination
- For best results use Connectix Easy RJ45 Crimping Tool

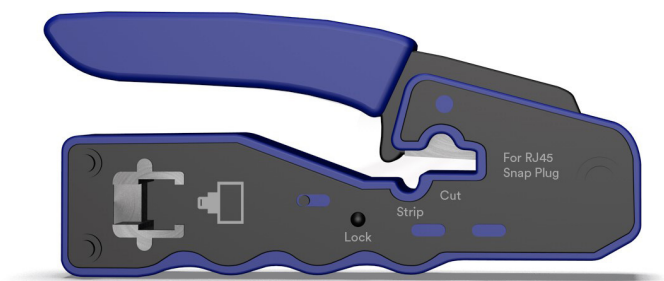

Physical and Mechanical Specifications	
Conforms to	ANSI/TIA-568.2-D ; ISO/IEC 11801 :2002/Amd.2:2010 ; IEC 60603-7-4 Compliant ; RoHS directive 2002/95/EC Compliant
Insertion Force & Withdrawal Force	30N Max
Durability	750 cycles Min
Operation Temperature	-40°C-+85°C
Plastic Parts	High quality engineering plastic
Contacts	0.35 mm Brass gold over nickel plating (3 Prongs)

Electrical Specifications	
Current Rating	1.5 Amps
Insulation Resistance	≥ 500 MΩ
Contact Resistance	≤20 mΩ
DC/AC Volt Endurance	DC1000V/AC750V 1min

Ordering Information	
Product Description	Part Number
Easy RJ45 Connectors Cat6 UTP	EZ-C6-UTP
Easy RJ45 Crimp Tool	EZ-CRIMP
Cat6 UTP Easy Plug 1 pk & 1 Crimp Tool Bundle	EZ-C6-UTP-B1
Cat6 UTP Easy Plug 5 pk & 1 Crimp Tool Bundle	EZ-C6-UTP-B3
Cat6 UTP Easy Plug 2 Box (40 pk) & 12 Crimp Tool Bundle	EZ-C6-UTP-B5


Connectix Cabling Systems™

Easy RJ45 Connectors - Cat6 FTP

Connectix Easy RJ45 Connectors have been designed with speed and precision in mind. The FTP modular plugs are made from high quality engineering plastic with brass gold over nickel plating on the outer shell. The crimp tool allows you to cut, strip, crimp and terminate a plug all in one with zero wastage or mess.

Features & Benefits

- Easy to verify RJ45 568A or 568B colour code
- Gold Plated Contacts
- Three prong terminal for both solid wire and stranded wire termination
- For best results use Connectix Easy RJ45 Crimping Tool

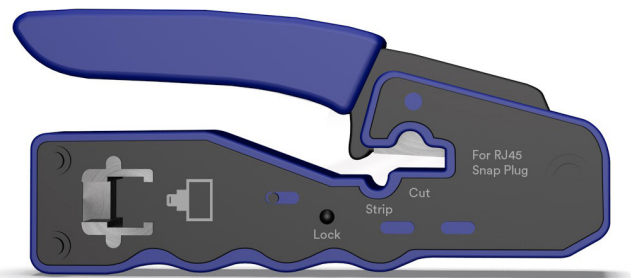

Physical and Mechanical Specifications	
Conforms to	ANSI/TIA-568.2-D ; ISO/IEC 11801 :2002/Amd.2:2010 ; IEC 60603-7-4 Compliant ; RoHS directive 2002/95/EC Compliant
Insertion Force & Withdrawal Force	30N Max
Durability	750 cycles Min
Operation Temperature	-40°C-+85°C
Plastic Parts	High quality engineering plastic
Contacts	0.35 mm Brass gold over nickel plating (3 Prongs)
Shell	Brass gold over nickel plating

Electrical Specifications	
Current Rating	1.5 Amps
Insulation Resistance	≥ 500 MΩ
Contact Resistance	≤20 mΩ
DC/AC Volt Endurance	DC1000V/AC750V 1min

Ordering Information	
Product Description	Part Number
Easy RJ45 Connectors Cat6 FTP	EZ-C6-FTP
Easy RJ45 Crimp Tool	EZ-CRIMP
Cat6 FTP Easy Plug 1 pk & 1 Crimp Tool Bundle	EZ-C6-FTP-B2
Cat6 FTP Easy Plug 5 pk & 1 Crimp Tool Bundle	EZ-C6-FTP-B4
Cat6 FTP Easy Plug 2 Box (40 pk) & 12 Crimp Tool Bundle	EZ-C6-FTP-B6